



RZ600 5W30 Engine Oil


RZ600 5W30 100% Synthetic Motor Oil improves engine performance and power. It provides a lubricating film at the cold start in an extremely quick and stable way and offers high thermal stability under heavy-duty operating conditions. It has excellent wear protection and friction reduction. Its high detergency keeps the engine optimally clean.

Compatibility:

- API SN/CF
- ACEA C3
- MB 229.51 / 229.52
- dexos 2
- Renault RN 0700 / 071

Advantages:

- Mid SAPS
- Aging resistance
- Stability of viscosity
- Fuel-saving
- Low exhaust gas emissions
- Low wear
- Engine cleanliness
- Longer maintenance interval

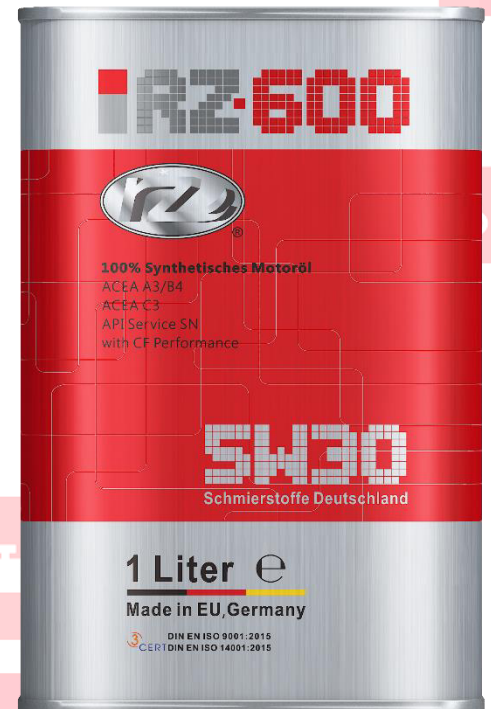

RZ600 100% Synthetic Motor Oil is suitable for gasoline and diesel engines such as home or commercial cars and coaches, meeting the requirements of engine to the latest emission standards.

Content: 1,0 Liter

Content Carton: 10 cans

Content: 60,0 Liter

Content Sea pallet: 9 drums

Content: 4,0 Liter

Content Carton: 4 cans

Content: 200,0 Liter

Content Sea pallet: 4 drums

Typical characteristics

Property	Method	Unit	Value
Density at 15 °C	DIN EN ISO 12185	g/ml	0,840 - 0,860
Kinematic viscosity KV 100	DIN 51562-1	mm ² /s	11,1 – 12,7
Viscosity index	DIN ISO 2909	-	min. 165
Flash point	DIN EN ISO 2592	°C	min. 200
Pour point	DIN EN ISO 3016	°C	max. -36
Total base number	DIN ISO 3771	mgKOH/g	7,1 – 9,3

These parameters are typical of current production. The data does not include any assurance of properties or the guarantee of suitability for a special application. Existing statutory provisions and ordinances, which relate to the handling and use of the products, must be observed by the recipient of our products.